

UNDERCOUNTER-TYPE DISHWASHER

PDX PDX-1003 Series

POWERFUL
& EFFICIENT



PRODUCT ADVANTAGES

■ All-in-One Design :

This compact sized undercounter dishwasher includes high quality wash pump, rinse pump and drain pump imported from South Korea. Washing is observable through large tempered glass to ensure proper operation and dishware hygiene.

■ Auto Drain System :

After each wash, the used water in wash tank is drained out automatically. This feature provides convenience for users when cleaning as well as better hygiene. The drain pump can be also operated manually on control panel.

■ Residential and Commercial Use :

Various electrical loads are available for residential and commercial use; 1.5 kW, 2.0 kW, 4.0 kW, 5.0 kW. For residential use (1.5 kW and 2.0 kW), electrical plugs can be used directly for electrical connection.

■ Internal Chemical Dispenser and Tablet Case :

Liquid chemicals can be used by connecting to internal chemical dispenser and solid chemicals can be used by placing tablets on stainless tablet case.






| MODEL | PDX-1003 SERIES |
|---------------------------|---------------------------|
| TYPE | ELECTRIC |
| TOTAL LOAD (Residential) | 1.5 kW |
| TOTAL LOAD (Commercial) | 2.0 kW / 4.0 kW / 5.0 kW |
| ELECTRICAL RATING | 220V, 50Hz, 1PH |
| WASH PUMP & RINSE PUMP | 350W / 90W |
| CAPACITY (Racks) | 30~40 /h |
| CYCLE TIME | 300~600 sec |
| WASH & RINSE TANK | 21 L, 9 L |
| TANK TEMPERATURE | 80~90°C |
| RINSE WATER CONSUMPTION | 2 L /min |
| DIMENSION (Outer), WEIGHT | 600 x 628 x 810 mm, 65 KG |



PDX-1003 UNDERCOUNTER-TYPE

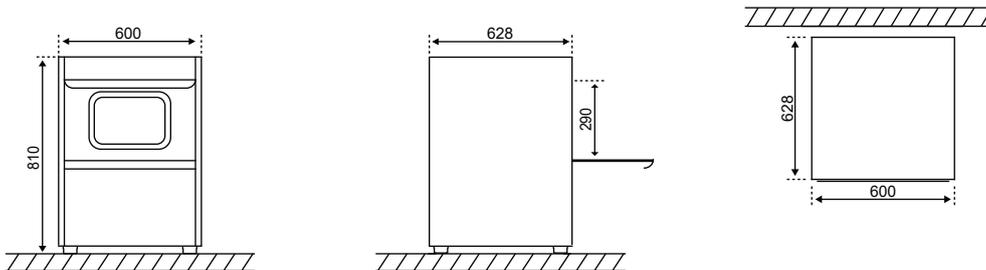

Dishwasher foot height is 20 mm. Foot height cannot be adjusted. Maximum inlet opening height is 380 mm.

